

Product Information **RS15/6 Bronze Pump**

2011.07.29

Technical Dept. Stella

Contents

- 1. Applications
- 2. Structure
- 3. Performances
- 4. Features

(Total 6 pages including cover)





1. Applications













- **♦**Solar Energy
- **♦**Heating & Cooling
- **♦**Sanitary
- **♦**Geothermal Energy






2. Structure: Anti-noise Design





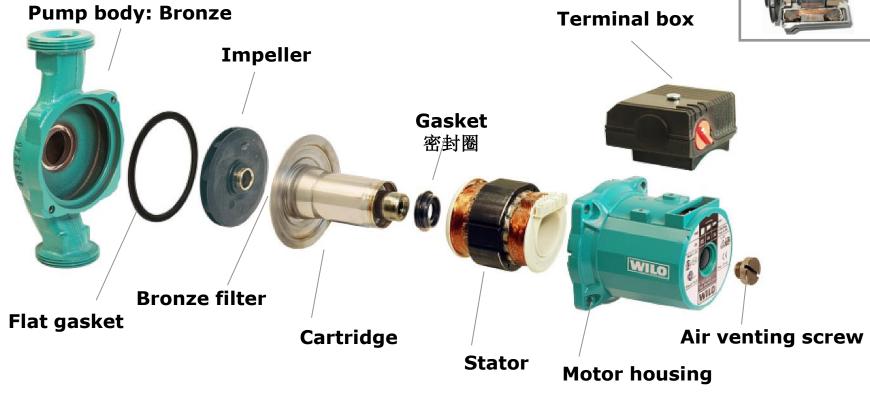

Wet Motor

Low Noise Level



3. Performances


WILO Bronze



Hydraulic Performance

Model	RS15/6
Power source	1φ, 230/220V, 50Hz
Input power(W)	46/67/93
Head(m)	5
Rated flow(L/min)	13
Capacitor	2.6uF
Protection Class	IP42
Connecter(mm)	G 1"
Max pressure	10bar
Insulation class	F
Liguid Temp.	100℃
Max.current	0.4A

Performance Curve

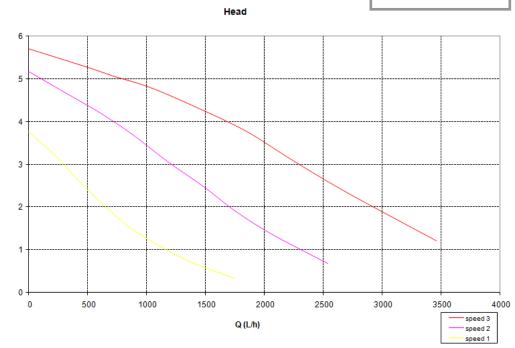

4. Features

WILO Bronze

Advantages

- Low noise level as a result of wet motor technology.
- Non seal type, No leakage.
- Bronze particle filter avoiding particles inside the motor chamber.
- Double stream flow with hollow shaft.
- With High-efficiency motor[★] pump is available max energy saving 80%.

★ To select High-efficiency motor please contact us



4. Features


WILO Bronze



★ Design Reliability

Cold water flowing around the cartridge, to the benefit of:

- anti running-stop
- venting



*** Highly Reliable Anti-rust construction**

Corrosion-resistant material: anticorrosion & lower noise

- Casing:Bronze
- Cartridge:Plastic & Stainless

® Operating Benefits

- 4 directions for teminal: 3h/6h/9h/12h
- 2 direction for cable: L & R
- 3 tap position to regulate speed



Flow Direction

⊗ Safe and Long-term Run

- Thermal or overload motor protection
- Highly reliable Motor (lower Temperature rise)

